

STAMFORD®

S4L1D-D41 Wdg.311 - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and As1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	AS440	MX341	MX321		
Voltage Regulation	±1%	±1%	±0.5%		with 4% Engine Governor

STAMFORD®

S4L1D-D41 Wdg.311

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Lap							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	12.29							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air	0.83 m³/sec				0.99 m³/sec			
Voltage Star	380	400	415	440	416	440	460	480
kVA Base Rating (Class H) for Reactance Values	300	310	310	290	344	370	375	390
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.15	2.94	2.73	2.27	3.60	3.46	3.21	3.07
X'd Dir. Axis Transient	0.20	0.19	0.17	0.14	0.22	0.21	0.20	0.19
X''d Dir. Axis Subtransient	0.14	0.13	0.12	0.10	0.15	0.14	0.13	0.12
Xq Quad. Axis Reactance	2.66	2.48	2.30	1.92	3.09	2.97	2.75	2.63
X''q Quad. Axis Subtransient	0.40	0.37	0.34	0.29	0.40	0.39	0.36	0.34
XL Stator Leakage Reactance	0.07	0.06	0.06	0.05	0.09	0.08	0.08	0.07
X2 Negative Sequence Reactance	0.27	0.25	0.23	0.19	0.28	0.27	0.25	0.24
X0 Zero Sequence Reactance	0.10	0.09	0.09	0.07	0.10	0.09	0.09	0.08
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.78	3.53	3.28	2.73	4.32	4.16	3.85	3.68
X'd Dir. Axis Transient	0.22	0.21	0.20	0.17	0.25	0.24	0.23	0.22

STAMFORD®

S4L1D-D41 Wdg.311

Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.08	
T''d SUB-TRANSTIME CONST.	0.019	
T'do O.C. FIELD TIME CONST.	1.7	
Ta ARMATURE TIME CONST.	0.018	
T''q SUB-TRANSTIME CONST.	0.0077	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.0124	
Rotor Winding Resistance (Rf)	1.05	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.0155	
Negative Sequence Resistance (R2)	0.017856	
Zero Sequence Resistance (R0)	0.0155	
Saturation Factors	400V	480V
SG1.0	0.31	0.31
SG1.2	1.25	1.25
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0.5, 1	N/A
Moment of Inertia	4.0771 kgm ²	N/A
Weight Wound Stator	415 kg	N/A
Weight Wound Rotor	361 kg	N/A
Weight Complete Alternator	940 kg	N/A
Shipping weight in a Crate	1010 kg	N/A
Packing Crate Size	155 x 87 x 107(cm)	N/A
Maximum Over Speed	2250 RPM for two minutes	







STAMFORD®

S4L1D-D41 Wdg.311

THREE PHASE EFFICIENCY CURVES

50Hz

60Hz

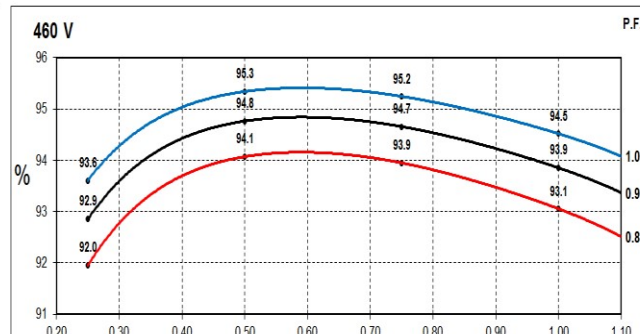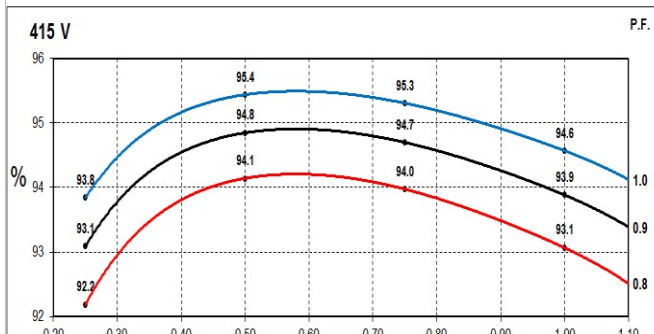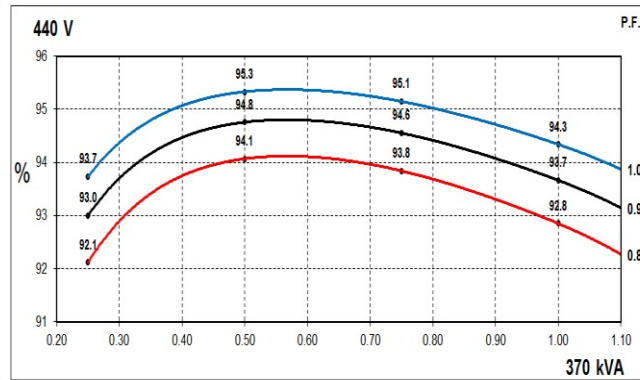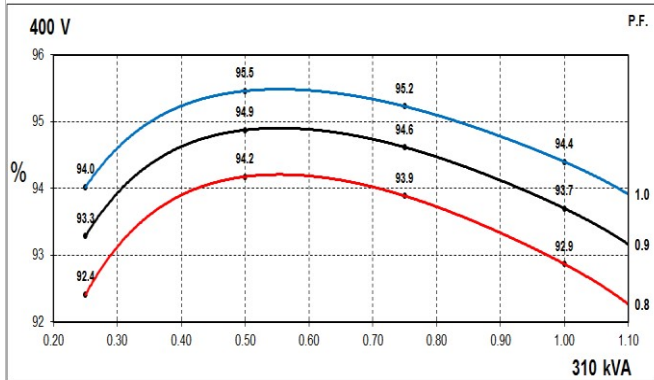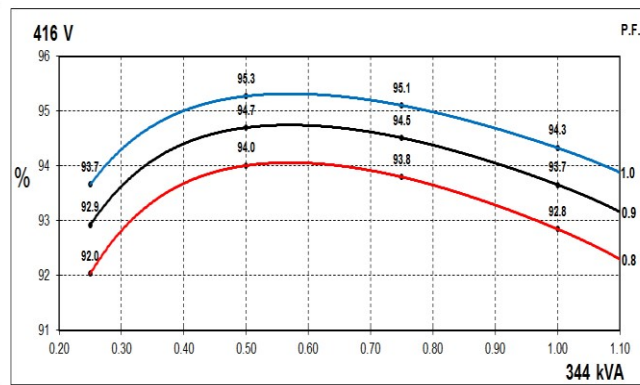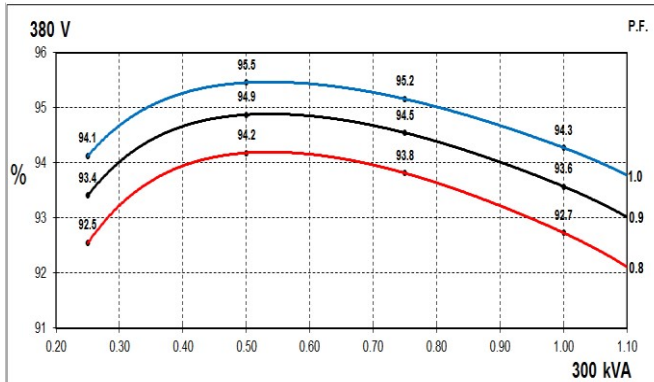


STAMFORD


S4L1D-D41 Wdg.311

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

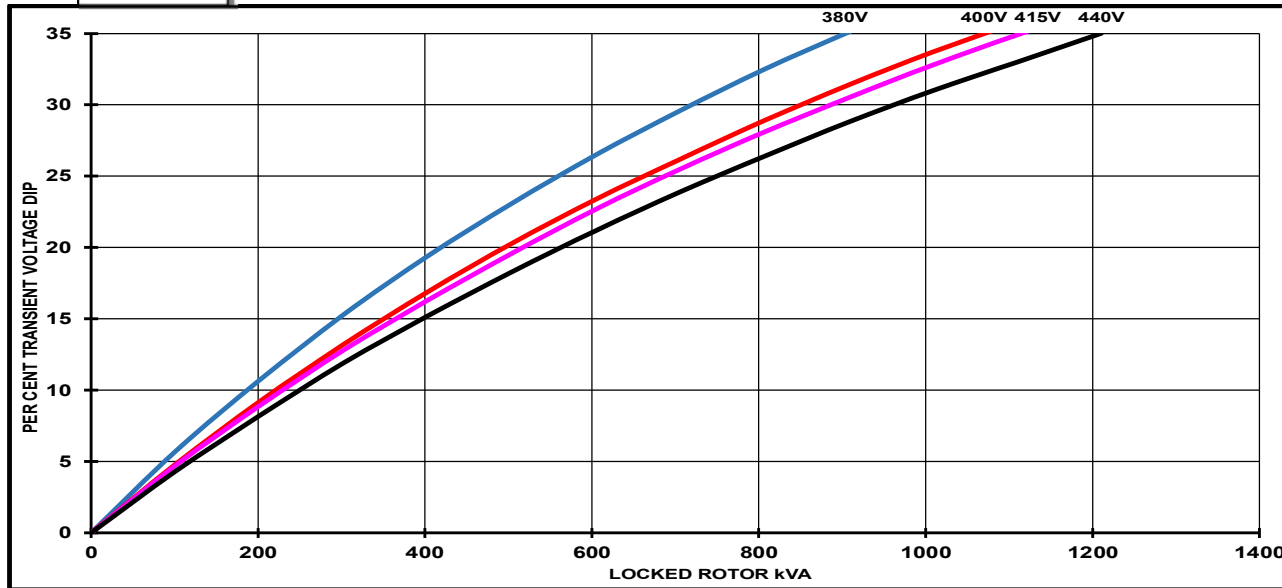

60Hz

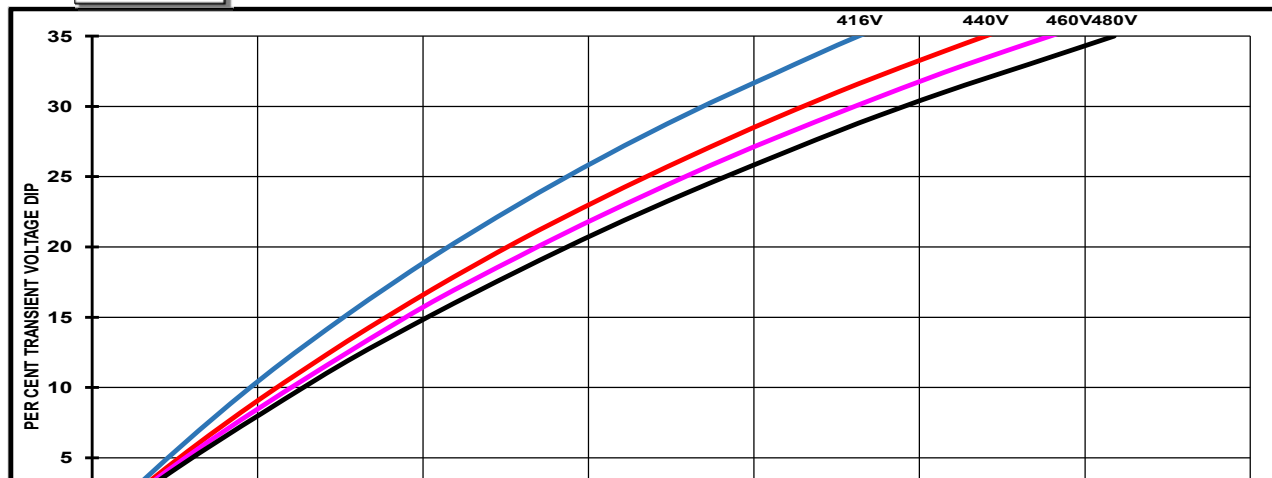


STAMFORD


S4L1D-D41 Wdg.311

Locked Rotor Motor Starting Curves - Self Excited

50Hz

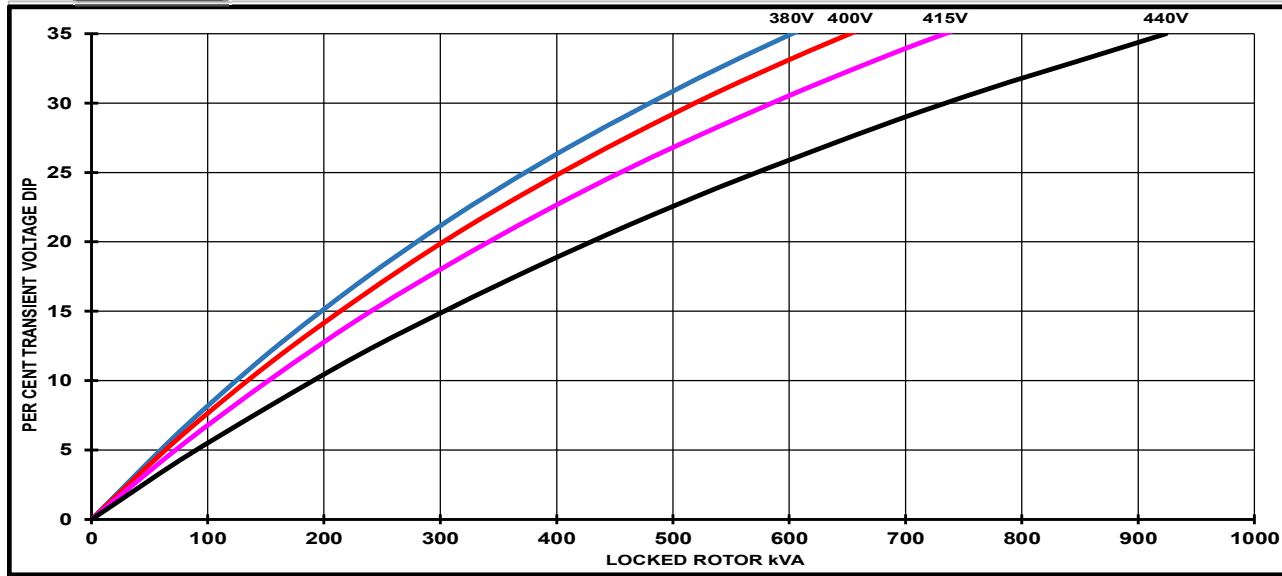

60Hz

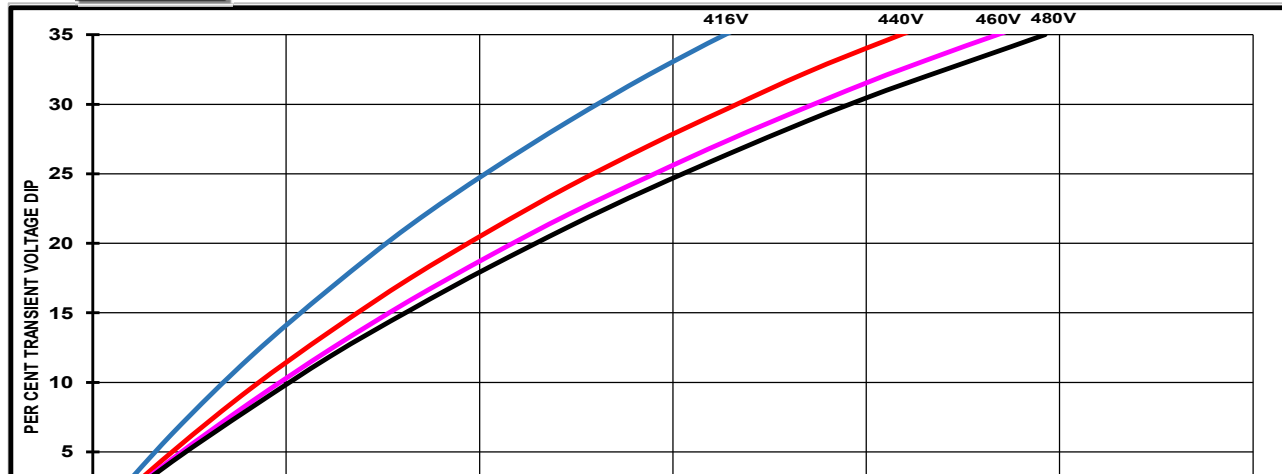


STAMFORD[®]

S4L1D-D41 Wdg.311


Three-phase Short Circuit Decrement Curve

50Hz

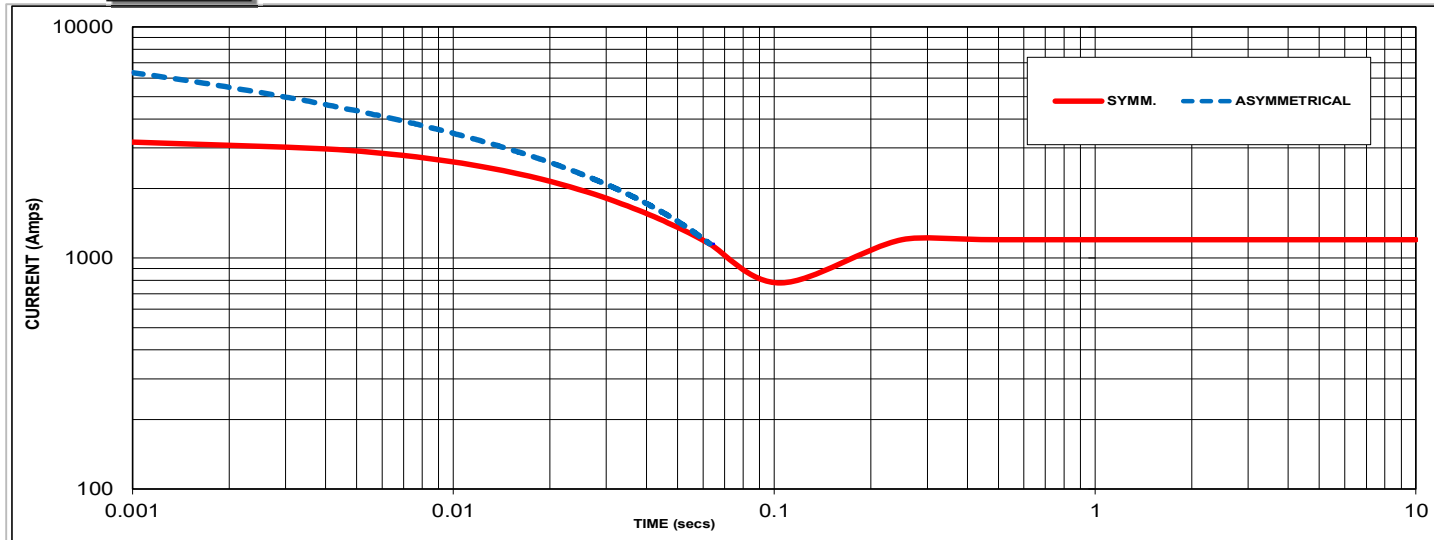

Sustained Short Circuit = 1200 Amps

60Hz

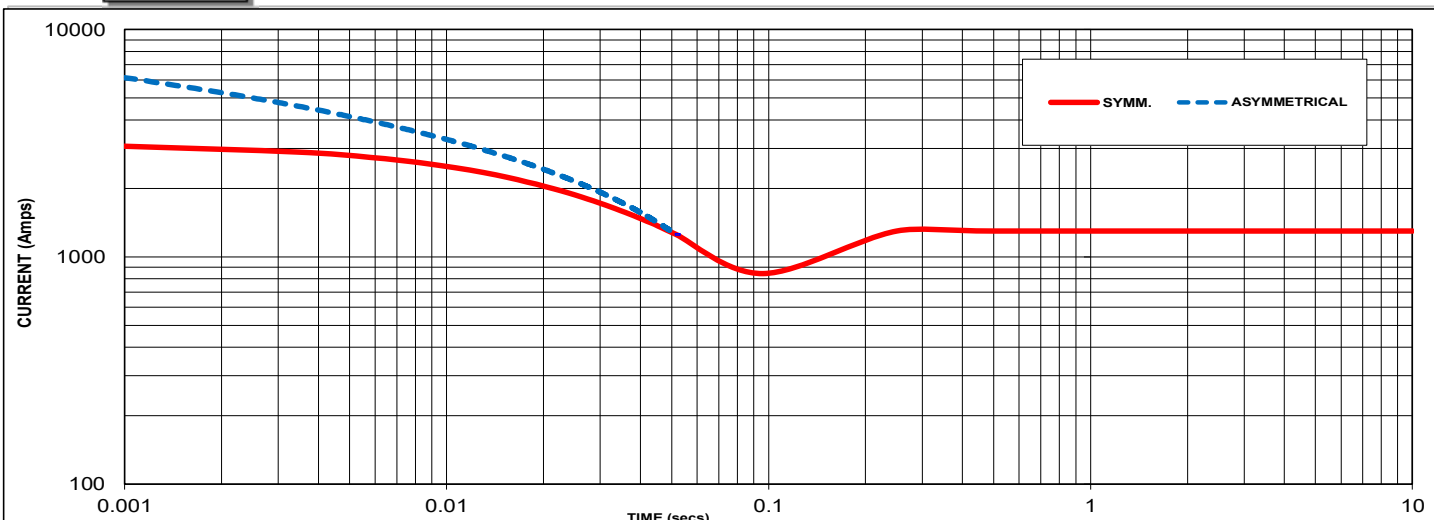


STAMFORD


S4L1D-D41 Wdg.311

Typical Alternator Operating Charts

400V/50Hz

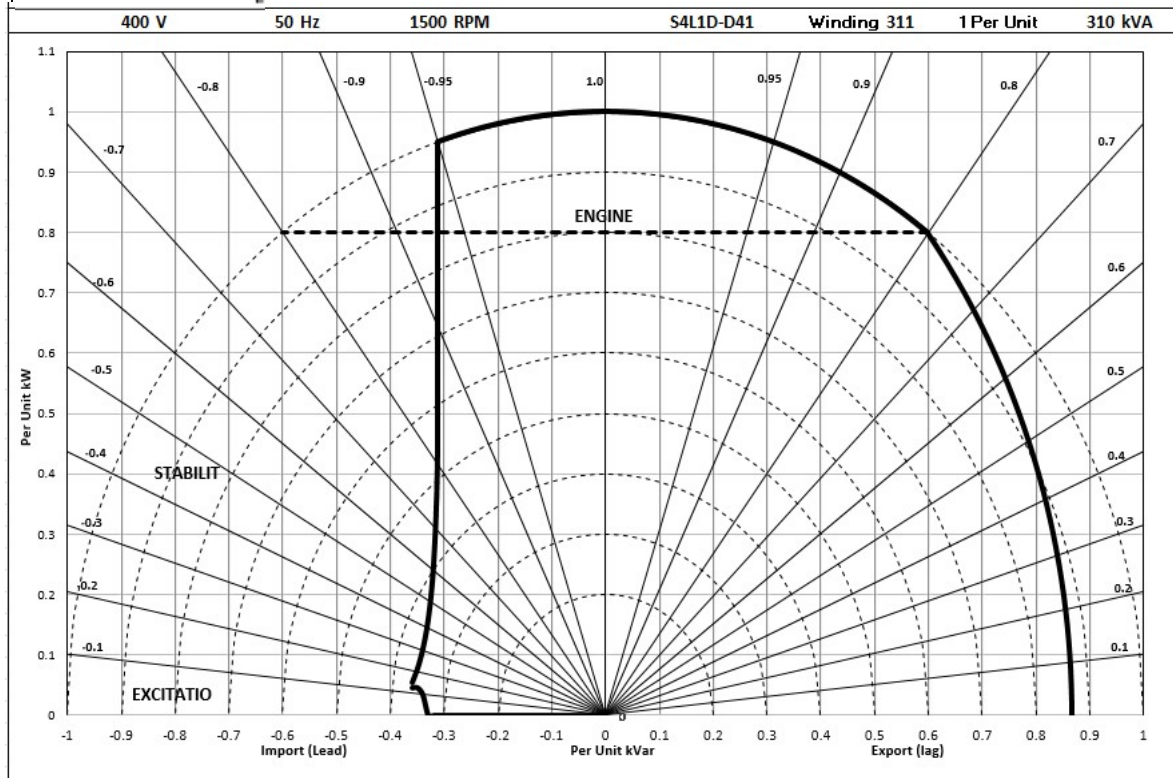

480V/60Hz

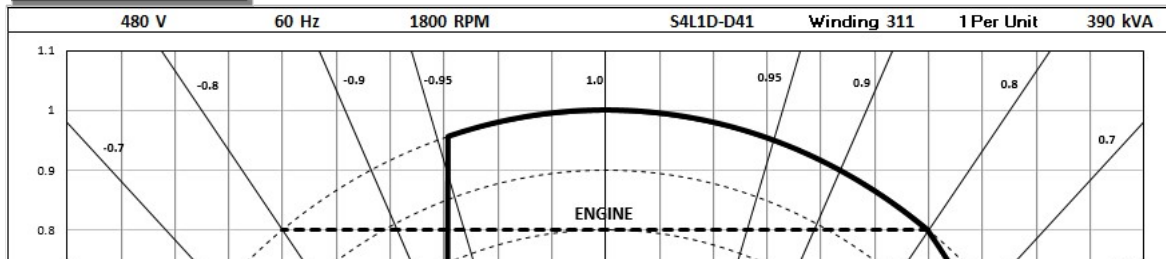

STAMFORD®

S4L1D-D41 Wdg.311

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	kVA	330	340	340	320	320	330	330	310	300	310	310	290	280	285	285	270
	kW	264	272	272	256	256	264	264	248	240	248	248	232	224	228	228	216
	Efficiency (%)	92.1	92.3	92.6	93.2	92.3	92.5	92.7	93.3	92.7	92.9	93.1	93.6	93.1	93.3	93.4	93.8
	kW Input	287	295	294	275	277	285	285	266	259	267	266	248	241	244	244	230

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	kVA	375	410	415	430	365	400	400	415	344	370	375	390	315	340	345	355
	kW	300	328	332	344	292	320	320	332	275	296	300	312	252	272	276	284
	Efficiency (%)	92.4	92.2	92.5	92.6	92.5	92.4	92.7	92.8	92.8	92.9	93.1	93.1	93.2	93.2	93.4	93.5
	kW Input	325	356	359	372	316	346	345	358	296	319	322	335	270	292	295	304

De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.



Follow us @stamfordavk



Cummins Generator Technologies